




GA504 Heavy-Duty Double Hammock Stand

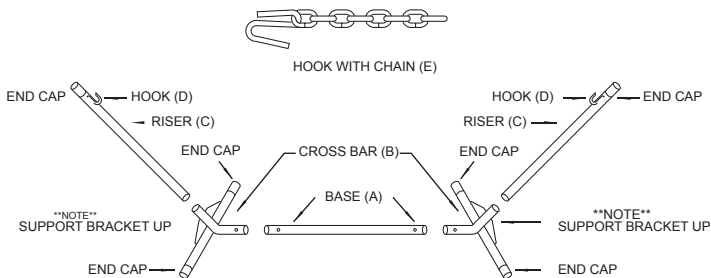

Installation:

1. Lay the long Base Tube (A) with the push button on each of the ground where the stand will be setup.
2. Slide the Cross Bar (B) with the support bracket facing up over each end of the Base Tube (A) until the push button pops out of the hole on each.
3. Insert one Riser (C) into the top of each Cross Bar (B) as far as it will go with the hook facing up toward each other.
4. Attach the Ring of the Hammock to one of the Hooks (D) on the Riser (C).
5. Attach the Chain with Hook (E) supplied to the opposite Ring of the Hammock & attach the Chain to the Hook on the Riser (C)
6. After use the Hammock with stretch out & the Chain (E) may not be necessary to use.

Disclaimer:

The Glocal International Limited and all agents and representatives thereof cannot assume responsibility for special, indirect, or consequential damages or contingent liability for use of this product in a manner not expressly intended by the manufacturer.

Warning:

1. Frame load limit 500 lbs.
2. This frame is not a swing and will not support perpendicular motion. Avoid wild and uncontrolled movement. Failure to comply could result in injury.
3. Keep kids away from the hammock stand at all times.

Care and Maintenance:

Although special anti-rusting treatment on our stand, periodically inspect the welded joints around the foot brackets. Check that no parts have rusted through, especially on any welded area. Using a commercially available rust inhibitor will prolong the life of your frame. Spray periodically where the different sections join.